

TOSHIBA TRANSISTOR SILICON NPN EPITAXIAL TYPE (PCT PROCESS)

2SC3329


FOR LOW NOISE AUDIO AMPLIFIER APPLICATIONS AND
RECOMMENDED FOR THE FIRST STAGES OF MC HEAD AMPLIFIERS

Unit in mm

- Very Low Noise in the Region of Low Signal Source Impedance
Equivalent Input Noise Voltage : $E_n = 0.6nV/\sqrt{Hz}$ (Typ.)
- Low Pulse Noise, Low $1/f$ Noise
- Low Base Spreading Resistance : $r_{bb'} = 2.0 \Omega$ (Typ.)
- Complementary to 2SA1316

MAXIMUM RATINGS ($T_a = 25^\circ C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CB0}	80	V
Collector-Emitter Voltage	V_{CE0}	80	V
Emitter-Base Voltage	V_{EB0}	5	V
Collector Current	I_C	100	mA
Base Current	I_B	20	mA
Collector Power Dissipation	P_C	400	mW
Junction Temperature	T_j	125	$^\circ C$
Storage Temperature Range	T_{slg}	$-55 \sim 125$	$^\circ C$

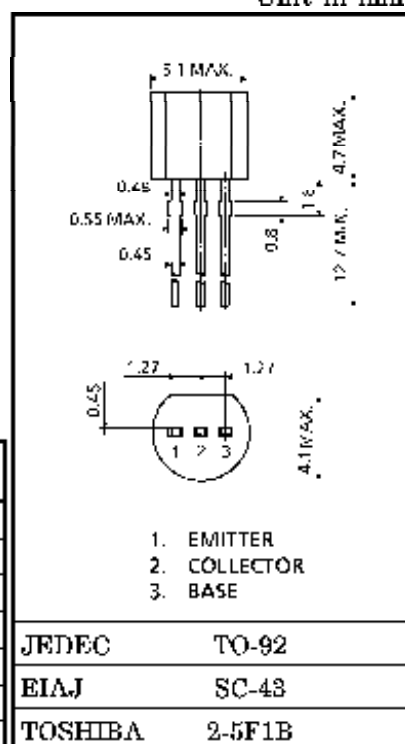

96100-14A1

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

ELECTRICAL CHARACTERISTICS (Ta = 25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{CBO}	$V_{CB} = 80\text{ V}, I_E = 0$	—	—	0.1	μA
Emitter Cut-off Current	I_{EB0}	$V_{EB} = 5\text{ V}, I_C = 0$	—	—	0.1	μA
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = 1\text{ mA}, I_B = 0$	80	—	—	V
DC Current Gain	h_{FE} (Note)	$V_{CE} = 6\text{ V}, I_C = 2\text{ mA}$	200	—	700	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = 10\text{ mA}, I_B = 1\text{ mA}$	—	—	0.1	V
Base-Emitter Voltage	V_{BE}	$V_{CE} = 6\text{ V}, I_C = 2\text{ mA}$	—	0.6	—	V
Base Spreading Resistance	$r_{bb'}$	$V_{CE} = 6\text{ V}, I_C = 1\text{ mA},$ $f = 100\text{ MHz}$	—	2.0	—	Ω
Transition Frequency	f_T	$V_{CE} = 6\text{ V}, I_C = 1\text{ mA}$	—	42	—	MHz
Collector Output Capacitance	C_{ob}	$V_{CB} = 10\text{ V}, I_E = 0, f = 1\text{ MHz}$	—	6.2	—	pF
Noise Figure	NF	$V_{CE} = 6\text{ V}, I_C = 0.1\text{ mA}$ $f = 10\text{ Hz}, R_G = 10\text{ k}\Omega$	—	2	6	dB
		$V_{CE} = 6\text{ V}, I_C = 0.1\text{ mA}$ $f = 1\text{ kHz}, R_G = 10\text{ k}\Omega$	—	1	2	
		$V_{CE} = 6\text{ V}, I_C = 0.1\text{ mA}$ $f = 1\text{ kHz}, R_G = 100\text{ }\Omega$	—	2.5	—	

Note : h_{FE} Classification GR : 200~400, BL : 350~700

