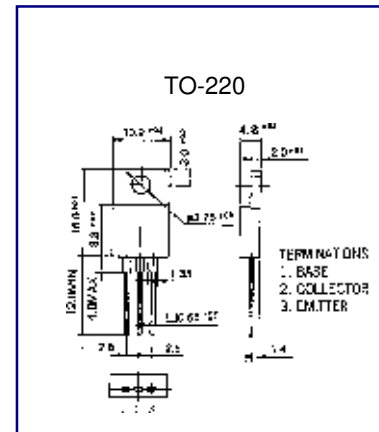


**2SD1128****NPN SILICON DARLINGTON TRANSISTOR****SWITCHING REGULATORS PWM INVERTERS
SOLENOID AND RELAY DRIVERS****ABSOLUTE MAXIMUM RATINGS ($T_A=25^{\circ}\text{C}$)**

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CB0}	150	V
Collector-Emitter Voltage	V_{CE0}	100	V
Collector Current (DC)	I_C	5	A
Collector Dissipation ($T_c=25^{\circ}\text{C}$)	P_C	30	W
Junction Temperature	T_j	150	$^{\circ}\text{C}$
Storage Temperature	T_{stg}	-50~150	$^{\circ}\text{C}$

**ELECTRICAL CHARACTERISTICS ($T_A=25^{\circ}\text{C}$)**

Characteristic	Symbol	Test Condition	Min	Typ	Max	Unit
Collector Cutoff Current	I_{CBO}	$V_{CB}=150\text{V}$, $I_E=0$			10	μA
Collector Cutoff Current	I_{CEO}	$V_{CB}=150\text{V}$, $I_B=0$			10	μA
DC Current Gain	h_{FE}	$V_{CE}=4\text{V}$, $I_C=1.0\text{A}$	5000			
Collector- Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=0.5\text{A}$, $I_B=0.001\text{A}$			1.5	V