


GENERAL PURPOSE APPLICATION,
SWITCHING APPLICATION.

FEATURES

- Excellent h_{FE} Linearity
 $\therefore h_{FE}(I_C=0.1mA)/h_{FE}(I_C=2mA)=0.95(TYP.)$
- Low Noise (NF=1dB(TYP.) at $f=1kHz$)
- Complementary to KTC9015.

MAXIMUM RATINGS (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CB0}	60	V
Collector-Emitter Voltage	V_{CE0}	50	V
Emitter-Base Voltage	V_{EB0}	5	V
Collector Current	I_C	150	mA
Emitter Current	I_E	~150	mA
Collector Power Dissipation	P_C	625	mW
Junction Temperature	T_J	150	°C
Storage Temperature Range	T_{STG}	-55~150	°C

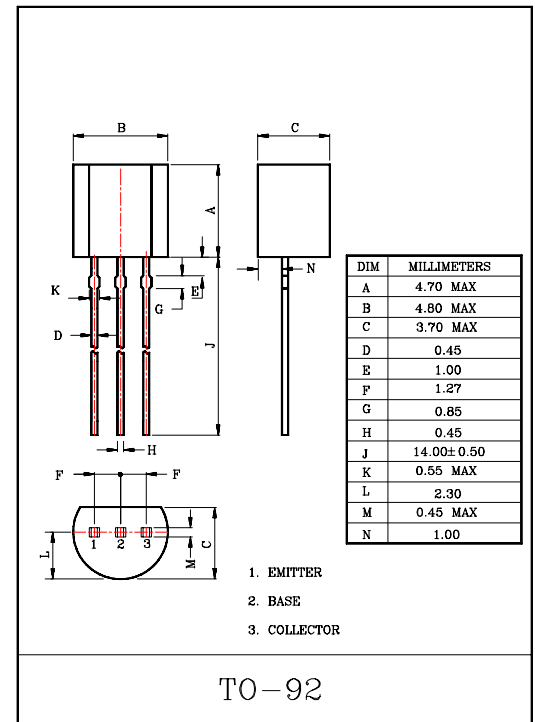

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current	I_{C0}	$V_{CE}=50V, I_E=0$	-	-	50	nA
Emitter Cut-off Current	I_{E0}	$V_{EB}=5V, I_C=0$	-	-	100	nA
DC Current Gain	h_{FE} (Note)	$V_{CE}=5V, I_C=1mA$	60	-	1000	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=100mA, I_E=10mA$	-	0.1	0.25	V
Transition Frequency	f_T	$V_{CE}=10V, I_C=1mA, f=100MHz$	60	-	-	MHz
Collector Output Capacitance	C_{ob}	$V_{CE}=10V, I_C=0, f=1MHz$	-	2.0	3.5	pF
Noise Figure	NF	$V_{CE}=5V, I_C=0.1mA, R_g=10k\Omega, f=1kHz$	-	1.0	10	dB

Note : h_{FE} Classification A:20~150, B:100~300, C:200~400, D:100~1000