


PANEL CUT OUT

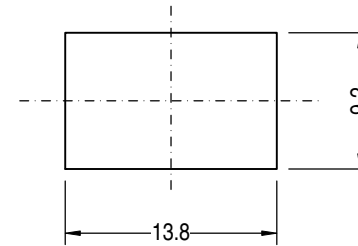

General specifications

Rating : A.C. 250V 3A
A.C. 125V 6A
Contact R.[max] : 50mΩ MAX
Insulation R.[min] : D.C. 500V 100MΩ
Withstand VOL. : A.C. 1,500V 1minute
Operating force : 450±100g
Life cycle[max] : 10,000 CYCLES

RS-001G




CIRCUIT 開關回路		
A	ON-OFF	2PIN
B	ON-ON	3PIN

COLOR OF ROCKER 按鈕顏色		
CODE	COLOR	
B	BLACK	黑色
H	GRAY	灰色

OPTION OF MARKING 按鈕印刷		
1	3	4

COLOR OF HOUSING 本體顏色	
CODE	COLOR
B	BLACK 黑色
H	GRAY 灰色

8	tortuous terminal	Copper strip 0.4mm H62
7	contact bridge	Copper strip 0.4mm H62
6	middle terminal	Copper strip 0.4mm H62
5	contact	AgZnO12/Cu
4	plunger	PA66-301-G0 NYLON
3	spring	steel wire
2	push button	PA66-301-G0 NYLON
1	base	PA66-301-G0 NYLON
NO	Description	Material

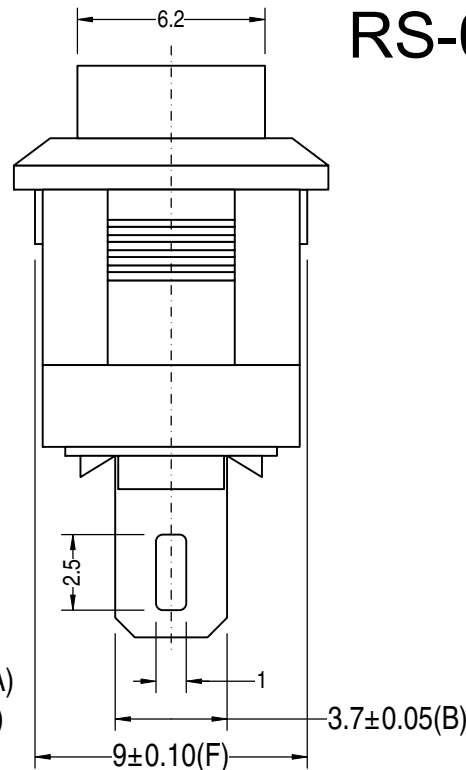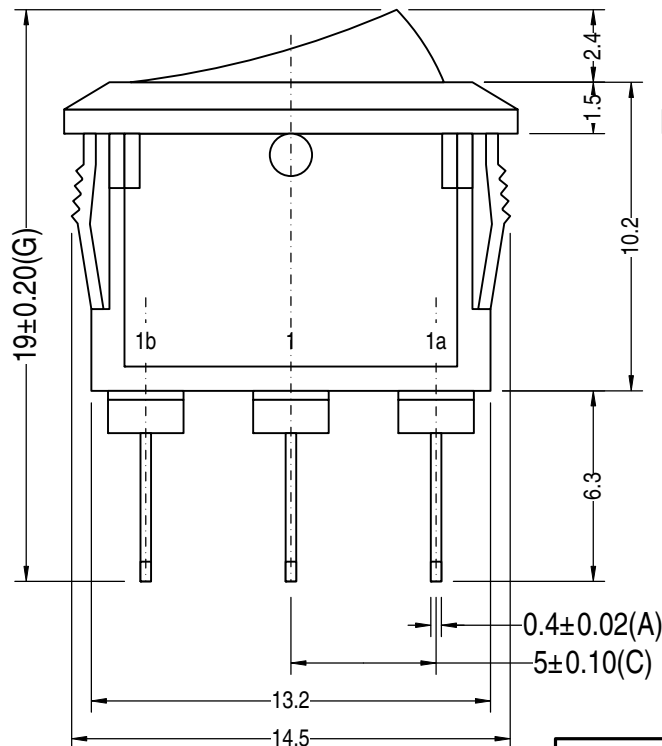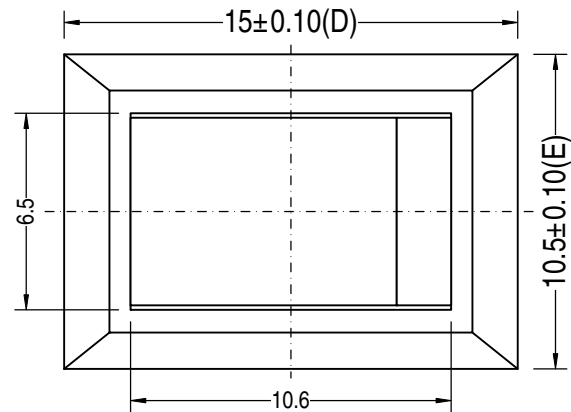

比例 SCALE 1 : 4

單位 DIMENSION m m

DO NOT SCALE DRAWING
TOLERANCES UNLESS OTHERWISE

UP TO 10 ±0.3

ABOVE 10 TO 100 ±0.5

ABOVE 100 ±0.8

ANGULAR DIMENSIONS ±5°

品名 TITLE

ROCKER SWITCH

型號 MODEL

RS-001G (KCD11) SERIES

繪圖
DRAWN

MKL 2006/05/26

核准
APPROVED

HSH 2006/05/26



版次
REVISION

A

日期
DATE

2006/05/26